


Dual Scaler Hi-Resolution Mixer Seamless Switcher for Large Screen Projections, Boardrooms and Classrooms

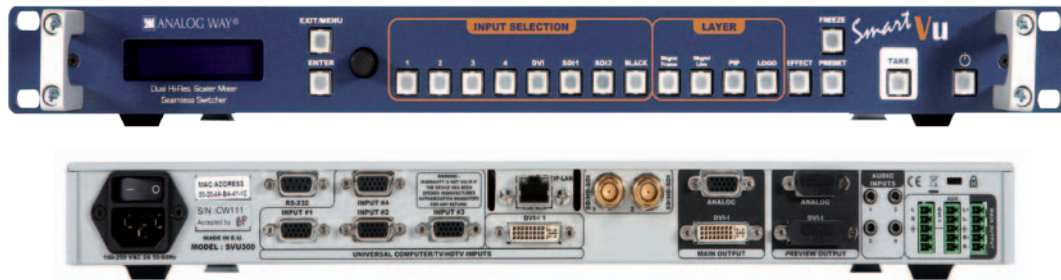

Inputs

Outputs

Features



Smart Vu at a glance

- > Dual Scaler enabling many transitions
- > Numerous effects
- > User-friendly
- > Compact and Universal
- > 2 options available (Logo and/or Preview)

Key Features

7 Inputs

- 1 DVI Input
- 4 Universal Analog Inputs
- 2 x 3G/HD/SD-SDI
- SDTV, EDTV, HDTV and Computer formats up to 2K
- Full digital In/Out Processing

Outputs

- 1 Analog and Digital Output
- Computer Formats up to 2K
- RGBHV, DVI and HDTV

Operation Modes & Effects

- 1 Operation Mode: Mixer
- Live Background and 1 Live PIP
- PIP: Pan & Zoom resizing up to 1000%
- PIP Open/Close Animation
- Transitions: Fade (Dissolve), Cut, Clean Cut, Wipe, Slide
- PIP Border (Edge: 1 Color, 1 Width)
- Smooth Move effect
- Chroma/Luma Key/DSK title
- DSK on Analog & Digital Inputs
- 4 Preset Layouts

Reference

- > [SVU300: Smart Vu](#)

Options


- > [OPT-MMS-Preview](#): Optional Preview Output
- > [OPT-MMS-LOGO \(4 logo memories, 4 frames\)](#):
Optional Logo/Frame

To Control SVU300

- > [Remote Control Software \(RCS\)](#): SVU300 (Supplied)
- > [ARC200](#): Axion2
- > [ORC50](#): Orchestra
- > [TRK-800](#): Triple Remote Keypad TRK-800
- > [RK-300](#): Remote Keypad RK-300



Diagram

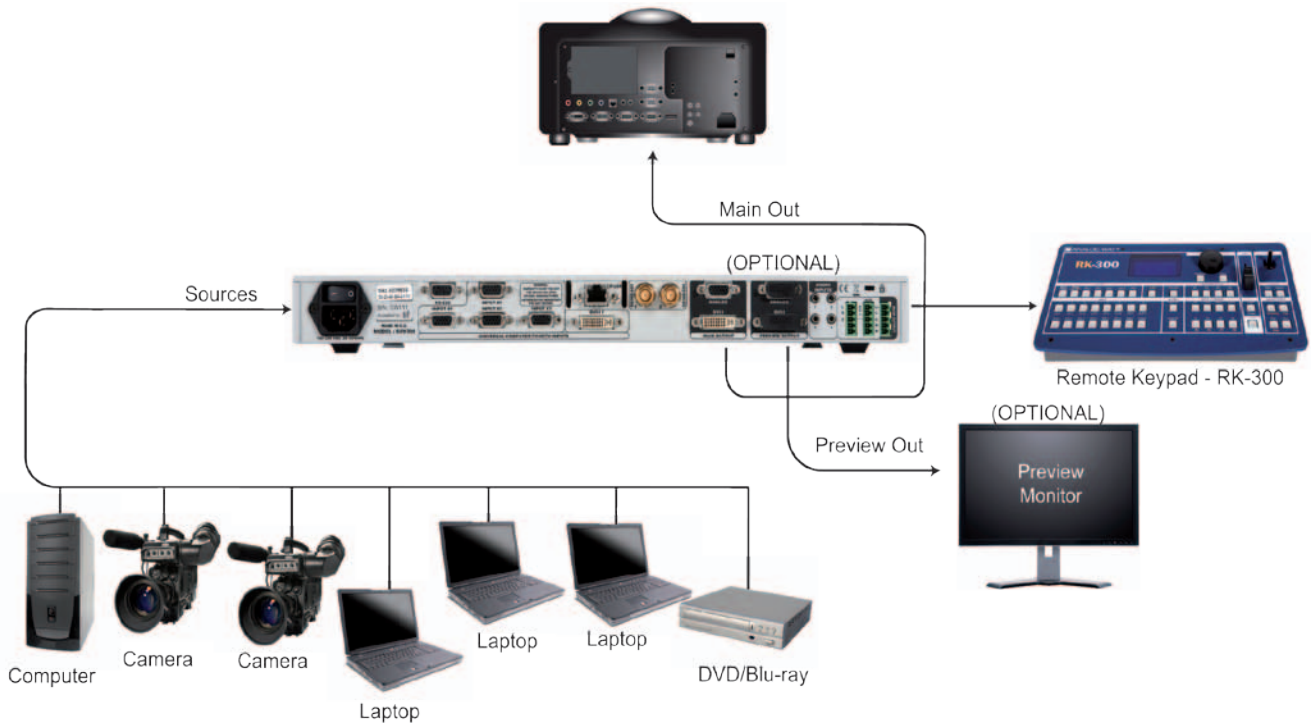

Technical Specifications

4 Universal Inputs - Analog Inputs (All inputs #1 to #4)

SD-TV:

- Composite, S.Video, YUV, RGB or RGBS
- NTSC: 15.735kHz/60Hz
- PAL/SECAM: 15.625kHz/50Hz

ED/HD-TV:

- RGB, RGBS or YUV
- 480p/60 Hz – 576p/50 Hz - 720p, 1080i, 1035i/50 or 60Hz – 1080p/24, 25, 30, 50 or 60 Hz – 1080psF /24, 25 or 30 Hz Computer
- RGBHV, RGBS or RGB
- Resolution up to 1600x1200/60 Hz, 1920x1200 /60 Hz or 2048x1080/60 Hz
- Horizontal frequency from 31.5 to 130 kHz
- Vertical frequency up to 130 Hz
- FpxMax = 165MHz

Digital Inputs (DVI-D, SDI1 and SDI2)

- DVI-D: HD-TV and Computer formats
- SDI: SD-TV & HD-TV – YUV/10bits/4:2:2, or 3G-SDI
- Automatic synchronization detection

Main and Preview Outputs (Optional)

Computer Digital and Analog:

- RGBHV, RGBS or RGB and DVI
- Resolution up to 1600x1200/60 Hz, 1920x1200/60 Hz or 2048x1080/60 Hz
- Vertical frequency 50, 60, 72 or 75 Hz depending on Output format
- FpxMax = 165MHz

HD-TV:

- RGB, RGBS or YUV, DVI
- 720p, 1080i, 1035i/50 or 60Hz - 1080p/24, 25, 30, 50 or 60Hz - 1080psF/24, 25 or 30Hz

Operation Standards

SMPTE 259M, SMPTE 274M, SMPTE 292M, SMPTE 296M and SMPTE 424M

Audio Stereo In/Out

Input:

- 5 Audio stereo inputs + 1 Auxiliary + 2 From Embedded SDI
- AUX Balanced
- Vi = +15dB
- Zi = 20 kOhms (Unbalanced)/40 kOhms (Balanced)
- Adjustable Level per input

Output:

- 1 output
- Balanced/Unbalanced
- Vo = +15 dBu/300 Ohms (Unbalanced)
- Vo = +21 dBu/600 Ohms (Balanced)

User Controls - Front Panel

- Standby On/Off
- Input, Layer direct access
- Freeze/Black
- Effect and preset selection
- Large Graphic VFD screen with control knobs and buttons for Easy and fast access to menus and adjustments

Connectors - Rear Panel

- Input #1 to #4 Connectors:
 - HD15-F: (Analog SD/ED/HD-TV and Computer)
- Input DVI-I 1 Connector:
 - DVI-I Female: (Analog SD/ED/HD-TV and Computer)
- Input SD/HD-SDI:
 - SDI 1 & SDI 2: BNC-F
- Audio:
 - 3.5mm Stereo jack: inputs #1 to #4
 - 5 pin MCO connectors: 2 for Inputs and 1 for Output

Main Output Connectors

- The output is fitted with:
 - DVI-I Female: (Digital and Analog) RGB or YUV
 - DVI-I Female: (Digital and Analog) RGB or YUV

Dimensions

- 1U, 19"
- D 13.8" x W 19" x H 1.74"
- D 330 mm x W 480 mm x H 44 mm

Weight

- 4.3kg/9.48lbs

Power Supply

- Internal, universal, automatic, 100-240V; 50/60 Hz; 140 W (UL, CSA, GS, CE)

Supplied with

- 1 x Power supply cord
- 1 x DVI-I male to HD15 Female and DVI-D Female breakout cable
- 1 x HD15 to 5 BNC cable
- 1 x Ethernet cross cable (for update)
- 1 x Set of 3 audio 5-pin screw terminals
- 1 x Remote Control Software (RCS) (PC Only)*
- 1 x User Manual* (PDF Version)
- 1 x Quick Start Guide*

Warranty

- 3-year warranty on parts and labor back to factory

Specifications subject to change without prior notice



* All RCS, User Manuals and Quick Start Guides are also available on www.analogway.com